


FOOT MASTER®


Heavy duty casters GXT series



kg 500~2,700kg **RoHS** **°C** -10~90°C

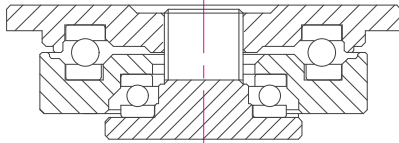



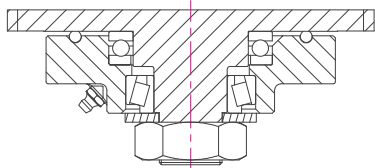





GXT(80~100)



GXT(125~250)

Brackets: Forged steel plate, double thrust bearing in the swivel head to optimize heavy load(125~250 series: thrust bearing and taper roller bearing), strong welded steel frame, hand-operated wheel brake system, special wheel axle for reinforce of smooth rolling
Surface Treatment: Powder coating, zinc plated

* Recommended Load = Load Cap. × 3

Swivel	Rigid	Swivel with brake	Wheel type	 mm	 mm	 Kg	 mm	 mm	 mm	 mm	 mm
GXT-80-ASF	GXT-80-ARF	GXT-80-BSF	HUD	80	48	500	120	40	100x85	80x60	9
GXT-100-ASF	GXT-100-ARF	GXT-100-BSF		100	48	600	140	40			
GXT-125-ASF	GXT-125-ARF	GXT-125-BSF		125	70	1,100	170	77.5			
GXT-150-ASF	GXT-150-ARF	GXT-150-BSF		150	68	1,500	224	48	175x140	148x111 132x99	14
GXT-200-ASF	GXT-200-ARF	GXT-200-BSF		200	68	2,000	275	60			
GXT-250-ASF	GXT-250-ARF	GXT-250-BSF		250	64	2,300	310	75			
GXT-80-ASF	GXT-80-ARF	GXT-80-BSF	MCD	80	48	800	120	40	100x85	80x60	9
GXT-100-ASF	GXT-100-ARF	GXT-100-BSF		100	48	900	140	40			
GXT-125-ASF	GXT-125-ARF	GXT-125-BSF		125	70	1,500	170	77.5			
GXT-150-ASF	GXT-150-ARF	GXT-150-BSF		150	70	2,200	200	80	175x140	148x111 132x99	14
GXT-200-ASF	GXT-200-ARF	GXT-200-BSF		200	70	2,500	260	75			
GXT-250-ASF	GXT-250-ARF	GXT-250-BSF		250	70	2,700	310	75			
GXT-100-ASF	GXT-100-ARF	GXT-100-BSF	NYD	100	48	900	140	40	100x85	80x60	9

Options

						
Code Suffix	HUD	HUD	MCD	NYD		
Description	Cast PU(D70)	Cast PU(A95)	MC nylon(D80)	Nylon66(D70)		
Available for	80 ~ 100	125 ~ 250	80 ~ 250	100		

Leveling casters
Compact casters
Shock absorbing casters
ACV casters
Stainless steel casters
Heat-resistant casters
Light duty casters
Medium duty casters
Heavy duty casters
Custom-made