

15 SDP Series Gardening Pumps

SDP GARDENING PUMPS

- Liquid temperature : 0~40°C / 32~104°F
- HP range : 1/3~1HP / 250~750W
- PH : 6~8
- Rated Speed : 2900 / 3450 rpm
- Protection calss : IP68
- Maximum depth : 8M

Features

1. All the material contacting water is stainless steel. No rusty issue.
2. Motor-cooling design & 24 hours operation.
3. Upper inlet design ensure motor operate in low water level.


Applications

1. Fish pond cleaning
2. Garden landscaping
3. Circulating water


Specification

Model No.	Output		Outlet		Pass Solid Dia(mm)	Max Flow(LPM)	LPM Flow @ Head					Max Head(M)	Dimension		Weight Kg
	HP	W	mm	inch			1.5M	3M	6M	9M	12M		L x W x H(mm)		
SDP-250	1/3	250	50	2"	7	200	195	185	135	-	-	9	181 x 181 x 340		12
SDP-400	1/2	400	50	2"	7	220	215	210	180	120	-	12	181 x 181 x 340		12
SDP-750	1	750	50	2"	7	280	275	265	240	200	135	15	181 x 181 x 343		15

Sectional View

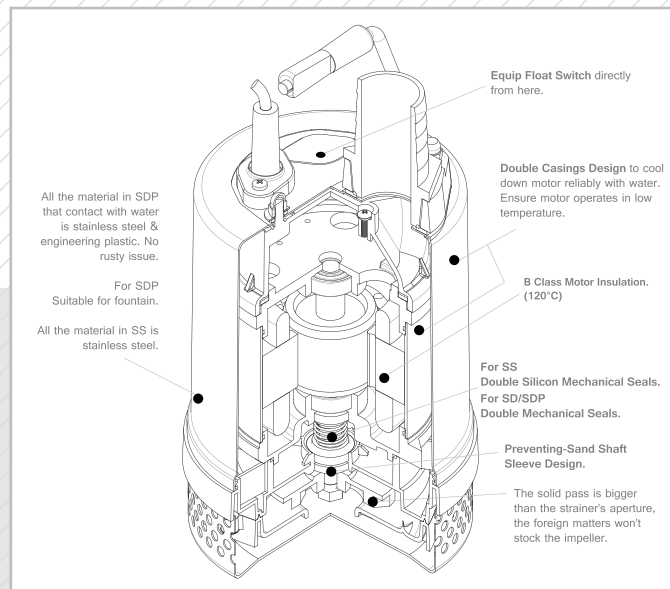

Curve



Standard Accessories

Model No.	Accessories
SDP-250	Flange , Hose connection
SDP-400	Flange , Hose connection
SDP-750	Flange , Hose connection



Dimension

Model	Dimension				
	W	H	H1	H2	G
	mm	mm	mm	mm	inch
SDP-250	185	350	270	280	2
SDP-400	185	350	255	280	2
SDP-750	185	365	285	295	2

