



## Handheld reader OHV1000-F223-R2

- All common 1-D or 2-D codes can be read
- Dual lens for large read range
- Reading of laser-engraved, etched, or printed codes
- Reads from reflective surfaces
- Programmable with JavaScript
- Audible, tactile, and visual user feedback
- Degree of protection IP54


Handheld reader for reading lasered, punched or printed 1-D and 2-D codes



### Function

The OHV1000 handheld is a compact handheld reader for all common 1-D and 2-D codes applied directly to the surface of a product. For example, the code may have been etched, printed, or laser-engraved on the housing. Special technology to prevent glare allows the device to accurately read codes on highly reflective surfaces. With its patented dual lens and a resolution of 1.2 million pixels, it can read both small and large codes from a wide range of distances. Feedback comes in the form of a visual or audible signal or a vibration. Using the Vision Configurator software, rule sets can be created for formatting read results without the need for extensive programming work. This facilitates integration into ERP systems. Data is transferred via USB or RS-232, depending on which connection cable is selected. With its robust housing and IP54 protection, the handheld reader is ideally suited to heavy-duty industrial use.

Dimensions

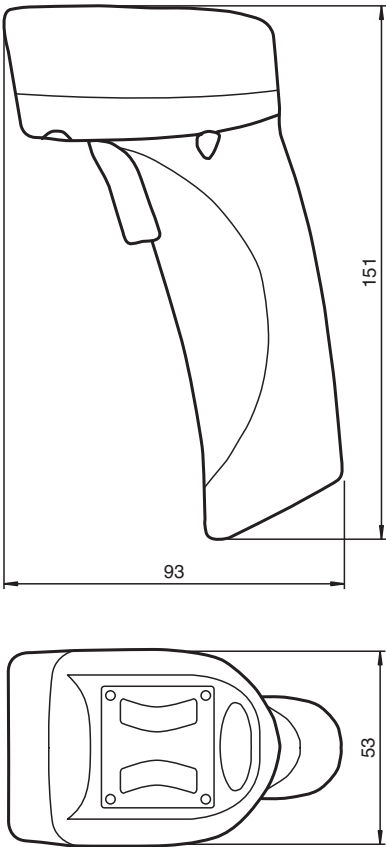

Technical Data

General specifications	
Light type	Integrated LED lightning (red)
Readable codes	<b>1-D Codes:</b> Codabar, Code 11, Code 32, Code 39, Code 93, Code 128, Interleaved 2 of 5, GS1 DataBar, Hong Kong 2 of 5, Matrix 2 of 5, MSI Plessey, NEC 2 of 5, Pharmacode, Plessey, Straight 2 of 5, Telepen, Trioptic, UPC/EAN, BC412 <b>Stacked 1-D Codes:</b> GS1 Composite, MicroPDF, PDF417 <b>2-D Codes:</b> Aztec Code, Code 49, Codablock F, Data Matrix, Han Xin, MaxiCode, Micro QR, QR Code <b>Postal Codes:</b> Australian Post, Intelligent Mail, Japan Post, KIX Code, Korea Post, Planet, Postnet, UK Royal Mail, UPU ID-tags
Read distance	0 ... 200 mm depending on the code type and reading mode
Modul size	min. 0.1 mm
Ambient light limit	96890 Lux
Target velocity	Stop
Nominal ratings	
Camera	
Type	CMOS
Number of pixels	1280 x 960
Image recording	real-time , manually triggered
Indicators/operating means	
Function indicator	LED green: Data carrier read
Electrical specifications	
Supply	via cable
Interface	
Physical	USB 2.0 , RS-232


Technical Data

Ambient conditions		
Ambient temperature		-20 ... 55 °C (-4 ... 131 °F)
Storage temperature		-30 ... 65 °C (-22 ... 149 °F)
Relative humidity		5 ... 95 % non-condensing
Shock and impact resistance		Withstands multiple drops from 1.8 m / 6 ft onto a concrete surface
Mechanical specifications		
Degree of protection		IP54
Connection		System connector for connecting cable
Material		
Housing		plastic
Mass		130 g
Dimensions		93 mm x 53 mm x 151 mm (l x w x h)
Height		151 mm
Width		53 mm
Length		93 mm
General information		
Scope of delivery		Handheld reader


Connection

Pin	Signal
1	+VIN
2	USB_DM
3	USB_DP
4	RS 232 TX
5	RS 232 RTS
6	RS 232 RX
7	RS 232 CTS
8	External Trigger
9	not connected
10	Ground

Connection Assignment



Assembly

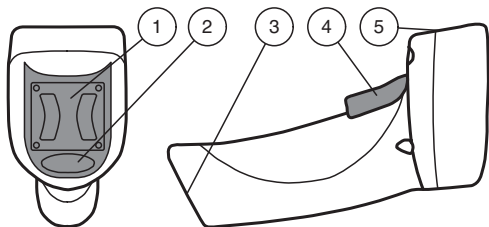

1	Mounting bracket
2	Function indicator
3	10-pin connector socket
4	Trigger button
5	Optics

Release date: 2025-02-25 Date of issue: 2025-02-25 Filename: 272204\_eng.pdf